
SFP+ 10G BIDI LR 20KM Transceiver

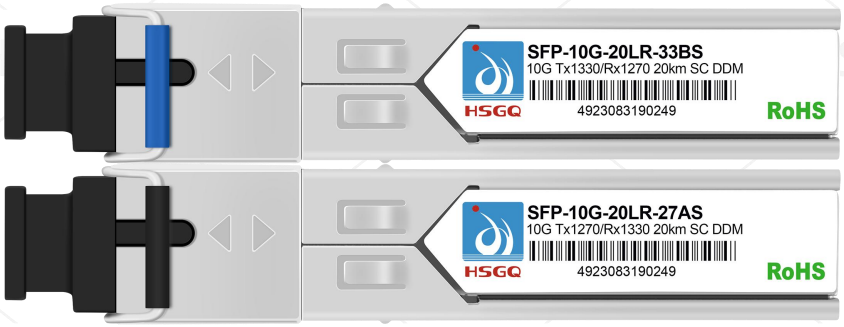

Product Features

- 10Gb/s serial optical interface compliant to 802.3ae 10GBASE-LR
- Electrical interface compliant to SFF-8431 specifications for enhanced 8.5 and 10 Gigabit small form factor pluggable module "SFP+"
- 1270/1330nm DFB transmitter, PIN photo-detector
- 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface for optical transceivers
- ll-metal housing for superior EMI performance
- Low power consumption
- Advanced firmware allow customer system encryption information to be stored in transceiver
- Cost effective SFP+ solution, enables higher port densities and greater bandwidth
- RoHS compliant
- Operating case temperature range: Commercial:0 to 70℃; Industrial: -40 to 85℃

Applications

- High-speed storage area networks
- Computer cluster cross-connect
- Custom high-speed data pipes

Description


This 1270/1330nm DFB 10Gigabit SFP+ transceiver is designed to transmit and receive optical data over single mode optical fiber for link length 20km.


The SFP+ module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module provides differential termination and reduce differential to common mode conversion for quality signal termination and low EMI. SFI typically operates over 200 mm of improved FR4 material or up to about 150mm of standard FR4 with one connector.

The transmitter converts 10Gbit/s serial CML electrical data into serial optical data compliant with the 10GBASE-LR standard. An open collector compatible Transmit Disable (Tx_Dis) is provided. A logic "1," or no connection on this pin will disable the laser from transmitting. A logic "0" on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (TFault) is provided. TX_Fault is a module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX_Fault output contact is an open drain/collector and shall be pulled up to the Vcc_Host in the host with a resistor in the range 4.7-10 kΩ. TX_Disable is a module input contact. When TX_Disable is asserted high or left open, the SFP+ module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 kΩ to 10 kΩ resistor


The receiver converts 10Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx_LOS contact is an open drain/collector output and shall be pulled up to Vcc_Host in the host with a resistor in the range 4.7-10 kΩ, or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx_LOS signal is intended as a preliminary indication to the system in which the SFP+ is installed that the received signal strength is below the specified range. Such an indication typically points to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.

(1) PROPOSED APPLICATION SCHEMATICS

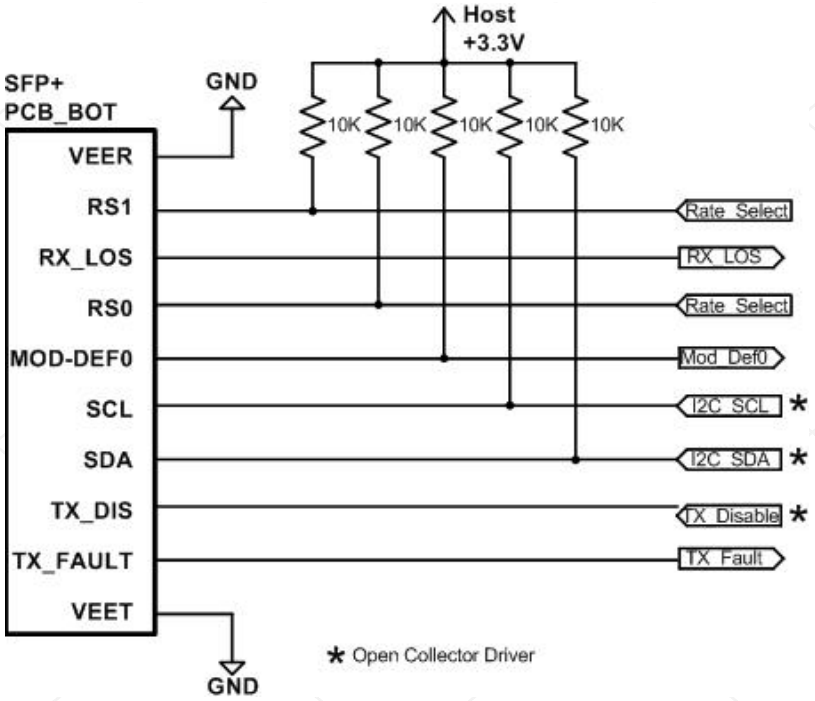

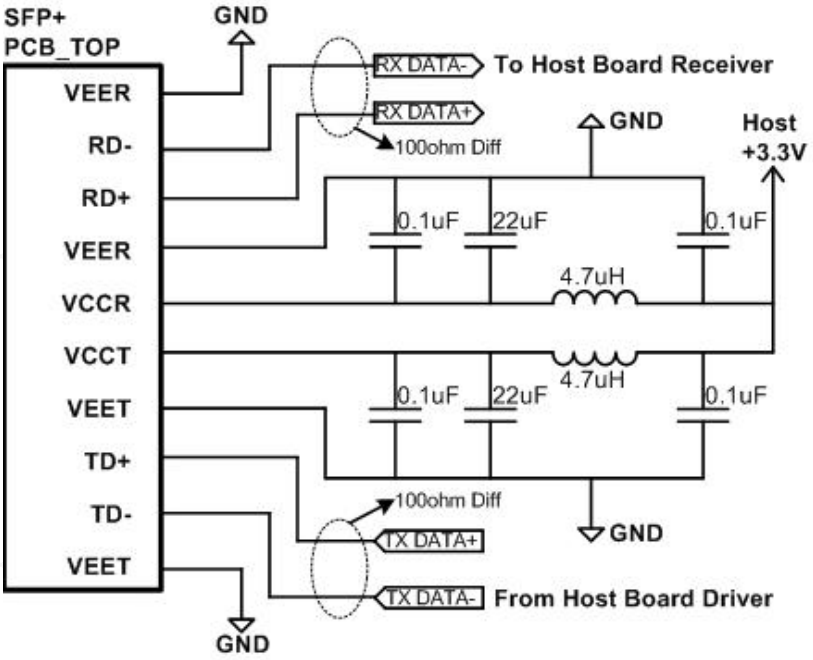

(2) TRANSCEIVER BLOCK DIAGRAM

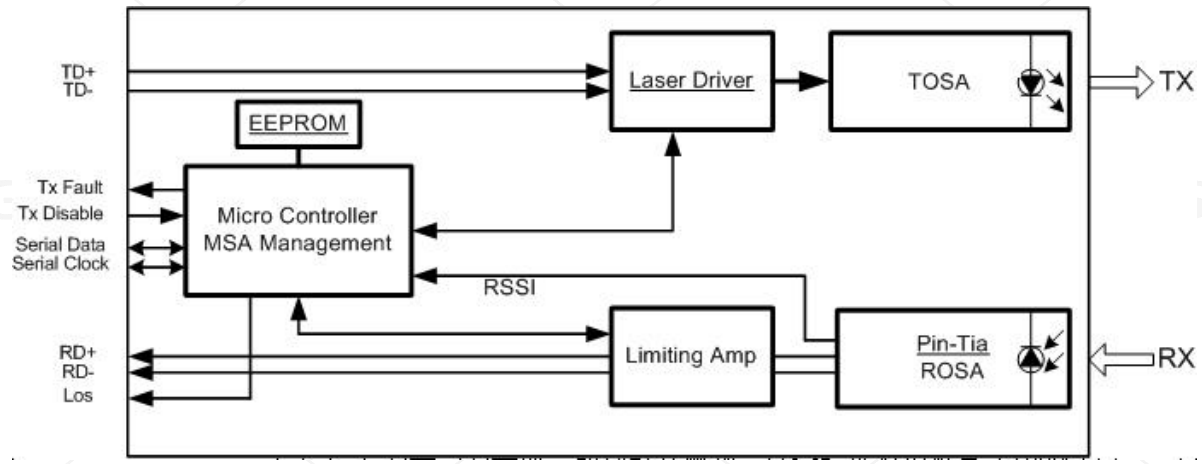
TD+
TD-
Laser Driver
TOSA
TX
EEPROM
Tx Fault
Tx Disable
Serial Data
Serial Clock
Micro Controller
MSA Management
RSSI
RD+
RD-
Los
Limiting Amp
Pin-Tia
ROSA
RX

Product specifications

(1) Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units
Power Supply Voltage	Vcc	0	3.6	V
Storage Temperature	Tc	-40	85	°C
Operating Case Temperature	Tc	0	70	°C
		-40	85	
Relative Humidity	RH	5	95	%
RX Input Average Power	Pmax		6	dBm

Note:

1、Exceeding any of these values may immediately damage the device.

(2) Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Units
Power Supply Voltage	Vcc	3.135	3.3	3.465	V
Power Supply Current	Icc			350	mA
Operating Case Temperature	Tc	0	25	70	°C
		-40	25	85	

Note:

1、Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

(3) Optical Characteristics

Parameters	Unit	Values
Operating Reach	m	20K
Transmitter		
Center wavelength (range)	nm	1270/1330
Side Mode Suppression Ratio (min)	dB	30
Launched power		
– maximum (Average)	dBm	2
– minimum (Average)	dBm	-4
Transmitter and dispersion penalty (max)	dB	3.2
Average launch power of OFF transmitter (max)	dBm	-30
Extinction ratio (min)	dB	3.5
RIN12 OMA (max)	dB/Hz	-128

Optical Return Loss Tolerance (min)	dB	12
Receiver		
Center wavelength (range)	nm	1270/1330
Receive overload (max) in average power(note 1)	dBm	0.5
Receive sensitivity (min) in average power(note 1)	dBm	-14
Receiver Reflectance (max)	dB	-12
Vertical eye closure penalty (min)(note 3)	dB	2.2
Los Assert(min)	dBm	-30
Los Dessert(max)	dBm	-12
Los Hysteresis(min)	dB	0.5
Stressed eye jitter (min)(note 2)	UIp-p	0.3
Receive electrical 3dB upper cutoff frequency (max)	GHz	12.3
Receiver power (damage, Max)	dBm	6

Note:

1、Average optical power shall be measured using the methods specified in TIA/EIA-455-95.

2、Power budget is defined as the different between the Rx sensitivity and the Tx output power of the interface.

3、Path penalty is intended as the power penalty of the interface between back-to-back and the maximum applied dispersion.

(4) DITITAL DIAGNOSTIC FUNCTIONS

Parameter	Symbol	Min	Max	Unit	Notes
Temperature monitor absolute error	DMI_Temp	-3	3	℃	Over operating temp
Laser power monitor absolute error	DMI_TX	-3	3	dB	
RX power monitor absolute error	DMI_RX	-3	3	dB	-1dBm to -15dBm range
Supply voltage monitor absolute error	DMI_VCC	-0.08	0.08	V	Full operating range
Bias current monitor	DMI_Ibias	-10%	10%	mA	

Note:

1、The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales stuff.

(5) Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Data Rate	/		10.3125		Gbps	
Power Consumption	/		800	1000	mW	
Transmitter						
Single Ended Output Voltage Tolerance		-0.3		4	V	
C common mode voltage tolerance		15			mV	

Tx Input Diff Voltage	VI	100		700	mV	
Tx Fault	VoL	-0.3		0.4	V	At 0.7mA
Data Dependent Input Jitter	DDJ			0.1	UI	
Data Input Total Jitter	TJ			0.28	UI	
Receiver						
Single Ended Output Voltage Tolerance		-0.3		4	V	
Rx Output Diff Voltage	Vo	300		850	mV	
Rx Output Rise and Fall Time	Tr/Tf	30			ps	20% to 80%
Total Jitter	TJ			0.7	UI	
Deterministic Jitter	DJ			0.42	UI	

Note:

1.The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.


(6) CONTROL AND STATUS I/O TIMING CHARACTERISTICS

Parameter	Symbol	Min	Max	Unit	Condition
TX Disable Assert Time	t_off		10	μs	Time from rising edge of TX Disable to when the optical output falls below 10% of nominal
TX Disable Negate Time	t_on		1	ms	Time from falling edge of TX Disable to when the modulated optical output rises above 90% of nominal
Time to initialize,including reset of TX_Fault	t_init		300	ms	From power on or negation of TX Fault using TX Disable
TX Fault Assert Time	t_fault		100	μs	Time from fault to TX fault on
TX Disable to reset	t_reset	10		μs	Time TX Disable must be held high to reset TX fault
LOS Assert Time	t_loss_on		100	μs	Time from LoS state to RX LOS assert
LOS Deassert Time	t_loss_off		100	μs	Time from non-LOS state to RX LOS deassert
Rate-Select Change Time	t_ratesel		10	μs	Time from rising or falling edge of Rate Select input until receiver bandwidth is in conformance with appropriate specification
Serial ID Clock Rate	t_serial_clock		100	kHz	

Note:

1、Timing characteristics of control and status I/O are included in Table 8, which is also defined in SFF-8431.

(7) Pin Assignment and Description

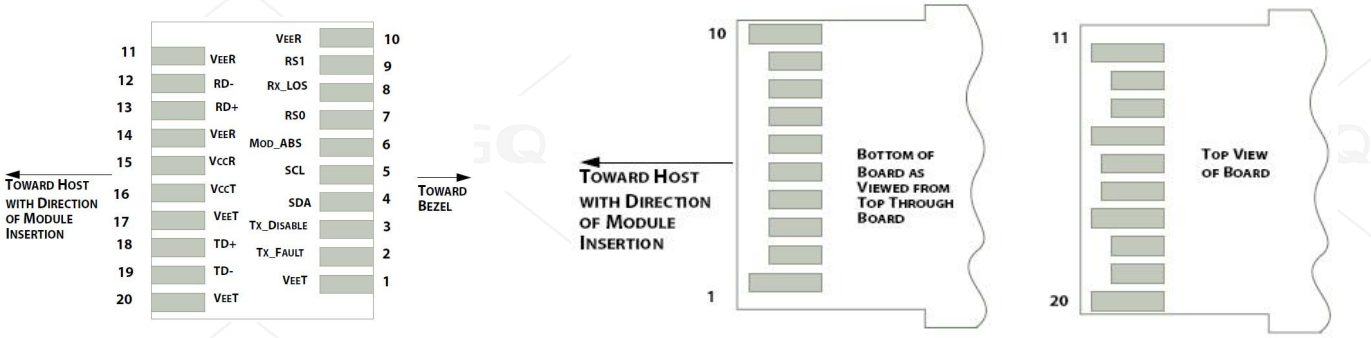

PIN Definition				
PIN	**Logic**	**Symbol**	**Description**	**Notes**
1		VeeT	Module Transmitter Ground	1
2	LVTTL-O	TX_Fault	Module Transmitter Fault	
3	LVTTL-I	TX_Dis	Transmitter Disable; Turns off transmitter laser output	
4	LVTTL-I/O	SDA	2-Wire Serial Interface Data Line	2
5	LVTTL-I	SCL	2-Wire Serial Interface Clock	2
6		MOD_DEF0	Module Definition, Grounded in the module	
7	LVTTL-I	RS0	Receiver Rate Select	
8	LVTTL-O	RX_LOS	Receiver Loss of Signal Indication Active LOW	
9	LVTTL-I	RS1	Transmitter Rate Select (not used)	
10		VeeR	Module Receiver Ground	1
11		VeeR	Module Receiver Ground	1
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Data Output (not used)	
14		VeeR	Module Receiver Ground	1
15		VccR	Module Receiver 3.3 V Supply	
16		VccT	Module Receiver 3.3 V Supply	
17		VeeT	Module Transmitter Ground	1
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	1


Note:

1、Module ground pins GND are isolated from the module case.

2、Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.

(8) Mechanical Specifications

- **SC Interface**

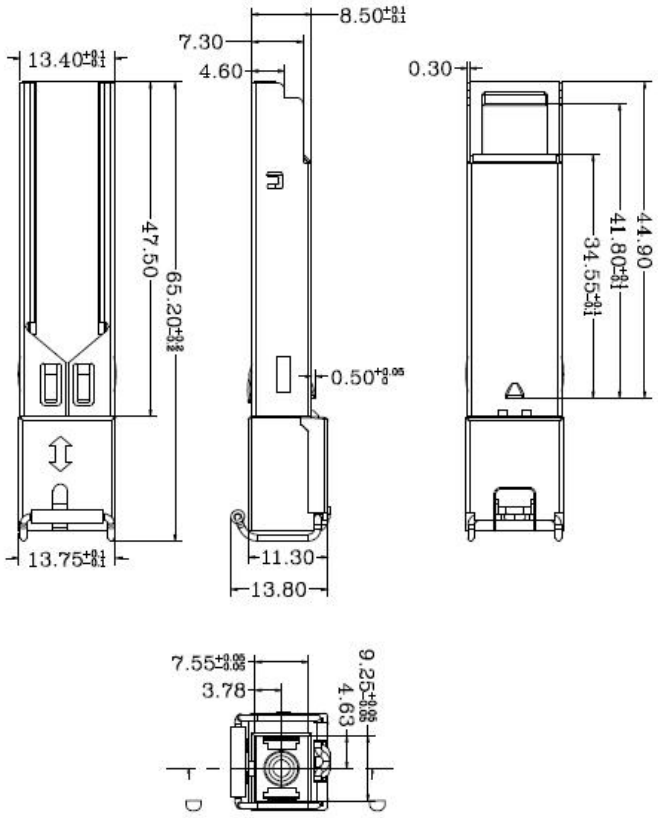

(9) ESD

This transceiver is specified as ESD threshold 2kV for all electrical input pins, tested per MIL-STD-883, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

(10) LASER SAFTY

This is a Class 1 Laser Product according to IEC 60825-1:1993:+A1:1997+A2:2001. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (July 26, 2001).

Ordering Information

Model	Specification Description						
SFP+-10G-20LR-27AS SFP+-10G-20LR-33BS	SFP+	BIDI/SM	10.3125G	T1270-R1330nm	20km	SC	0 ~ 70℃
SFP+-10G-20LR-27A SFP+-10G-20LR-33B				T1270-R1330nm	20km	LC	
SFP+-10G-40ER-27A SFP+-10G-40ER-33B				T1270-R1330nm	40km	LC	
SFP+-10G-60ER-27A SFP+-10G-60ER-33B				T1270-R1330nm	60km	LC	
SFP+-10G-80ZR-49A SFP+-10G-80ZR-55B				Tx1490-Rx1550nm	80km	LC	
SFP+-10G-100ZR-49A SFP+-10G-100ZR-55B				Tx1490-Rx1550nm	100km	LC	

Contact Information

Shenzhen HS Fiber Communication Equipment Co.,Ltd

Tel: 0755-8175 5526

Fax: 0755-8958 2791

E-mail: hsgq@hsgq.com

Website: www.hsgq.com

Address: 5th Floor, Building 2, Zone B, Hongfa Science and Technology Industrial Park, Tangtou Community, Shiyan Street, Baoan District, Shenzhen

All copyrights of this specification book belong to Shenzhen HS Fiber Communication Equipment Co..Ltd